


BZX55C

SILICON PLANAR ZENER DIODES

The Zener voltages are graded according to the international E24 standard.
Other tolerances and higher Zener voltages are upon request.

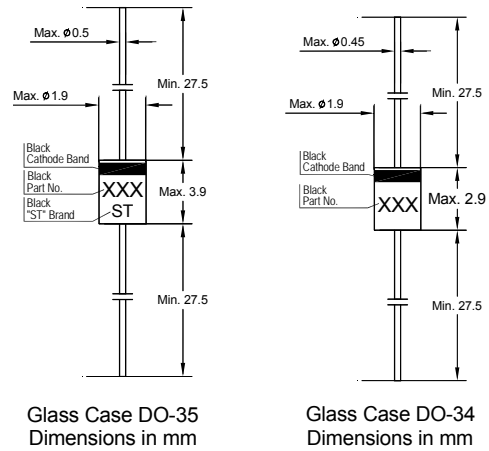

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


| Parameter | Symbol | Value | Unit |
|---------------------------|-----------|-------------------|------------------|
| Power Dissipation | P_{tot} | 500 ¹⁾ | mW |
| Junction Temperature | T_j | 175 | $^\circ\text{C}$ |
| Storage Temperature Range | T_s | - 55 to + 175 | $^\circ\text{C}$ |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Parameter | Symbol | Max. | Unit |
|--|-----------|-------------------|------|
| Thermal Resistance Junction to Ambient Air | R_{thA} | 0.3 ¹⁾ | K/mW |
| Forward Voltage at $I_F = 100\text{ mA}$ | V_F | 1 | V |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.



SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 12/06/2007

BZX55C

| Type | Zener Voltage Range ¹⁾ | | | Dynamic Resistance | | | Reverse Leakage Current | | | Temp. Coefficient of Zener Voltage |
|-------------------------|-----------------------------------|-----------------------|--------------------------|-----------------------------|--|------|----------------------------------|--|-----|------------------------------------|
| | V _{znom} V | I _{ZT} mA | for V _{ZT} V | r _{ZJT} Max.(Ω) | r _{ZJK} at I _{ZK} Max.(Ω) | mA | T _a =25°C Max.(μA) | T _a =125°C I _R at V _R Max.(μA) | V | TKvz %/K |
| BZX55C0V8 ²⁾ | 0.8 | 5 | 0.73...0.83 | 8 | 50 | 1 | -- | -- | -- | -0.26...-0.23 |
| BZX55C2V0 | 2 | 5 | 1.8...2.15 | 85 | 600 | 1 | 100 | 200 | 1 | -0.09...-0.06 |
| BZX55C2V2 | 2.2 | 5 | 2.08...2.33 | 85 | 600 | 1 | 75 | 160 | 1 | -0.09...-0.06 |
| BZX55C2V4 | 2.4 | 5 | 2.28...2.56 | 85 | 600 | 1 | 50 | 100 | 1 | -0.09...-0.06 |
| BZX55C2V7 | 2.7 | 5 | 2.5...2.9 | 85 | 600 | 1 | 10 | 50 | 1 | -0.09...-0.06 |
| BZX55C3V0 | 3 | 5 | 2.8...3.2 | 85 | 600 | 1 | 4 | 40 | 1 | -0.08...-0.05 |
| BZX55C3V3 | 3.3 | 5 | 3.1...3.5 | 85 | 600 | 1 | 2 | 40 | 1 | -0.08...-0.05 |
| BZX55C3V6 | 3.6 | 5 | 3.4...3.8 | 85 | 600 | 1 | 2 | 40 | 1 | -0.08...-0.05 |
| BZX55C3V9 | 3.9 | 5 | 3.7...4.1 | 85 | 600 | 1 | 2 | 40 | 1 | -0.08...-0.05 |
| BZX55C4V3 | 4.3 | 5 | 4...4.6 | 75 | 600 | 1 | 1 | 20 | 1 | -0.06...-0.03 |
| BZX55C4V7 | 4.7 | 5 | 4.4...5 | 60 | 600 | 1 | 0.5 | 10 | 1 | -0.05...+0.02 |
| BZX55C5V1 | 5.1 | 5 | 4.8...5.4 | 35 | 550 | 1 | 0.1 | 2 | 1 | -0.02...+0.02 |
| BZX55C5V6 | 5.6 | 5 | 5.2...6 | 25 | 450 | 1 | 0.1 | 2 | 1 | -0.05...+0.05 |
| BZX55C6V2 | 6.2 | 5 | 5.8...6.6 | 10 | 200 | 1 | 0.1 | 2 | 2 | 0.03...0.06 |
| BZX55C6V8 | 6.8 | 5 | 6.4...7.2 | 8 | 150 | 1 | 0.1 | 2 | 3 | 0.03...0.07 |
| BZX55C7V5 | 7.5 | 5 | 7...7.9 | 7 | 50 | 1 | 0.1 | 2 | 5 | 0.03...0.07 |
| BZX55C8V2 | 8.2 | 5 | 7.7...8.7 | 7 | 50 | 1 | 0.1 | 2 | 6.2 | 0.03...0.08 |
| BZX55C9V1 | 9.1 | 5 | 8.5...9.6 | 10 | 50 | 1 | 0.1 | 2 | 6.8 | 0.03...0.09 |
| BZX55C10 | 10 | 5 | 9.4...10.6 | 15 | 70 | 1 | 0.1 | 2 | 7.5 | 0.03...0.1 |
| BZX55C11 | 11 | 5 | 10.4...11.6 | 20 | 70 | 1 | 0.1 | 2 | 8.2 | 0.03...0.11 |
| BZX55C12 | 12 | 5 | 11.4...12.7 | 20 | 90 | 1 | 0.1 | 2 | 9.1 | 0.03...0.11 |
| BZX55C13 | 13 | 5 | 12.4...14.1 | 26 | 110 | 1 | 0.1 | 2 | 10 | 0.03...0.11 |
| BZX55C15 | 15 | 5 | 13.8...15.6 | 30 | 110 | 1 | 0.1 | 2 | 11 | 0.03...0.11 |
| BZX55C16 | 16 | 5 | 15.3...17.1 | 40 | 170 | 1 | 0.1 | 2 | 12 | 0.03...0.11 |
| BZX55C18 | 18 | 5 | 16.8...19.1 | 50 | 170 | 1 | 0.1 | 2 | 13 | 0.03...0.11 |
| BZX55C20 | 20 | 5 | 18.8...21.2 | 55 | 220 | 1 | 0.1 | 2 | 15 | 0.03...0.11 |
| BZX55C22 | 22 | 5 | 20.8...23.3 | 55 | 220 | 1 | 0.1 | 2 | 16 | 0.04...0.12 |
| BZX55C24 | 24 | 5 | 22.8...25.6 | 80 | 220 | 1 | 0.1 | 2 | 18 | 0.04...0.12 |
| BZX55C27 | 27 | 5 | 25.1...28.9 | 80 | 220 | 1 | 0.1 | 2 | 20 | 0.04...0.12 |
| BZX55C30 | 30 | 5 | 28...32 | 80 | 220 | 1 | 0.1 | 2 | 22 | 0.04...0.12 |
| BZX55C33 | 33 | 5 | 31...35 | 80 | 220 | 1 | 0.1 | 2 | 24 | 0.04...0.12 |
| BZX55C36 | 36 | 5 | 34...38 | 80 | 220 | 1 | 0.1 | 2 | 27 | 0.04...0.12 |
| BZX55C39 | 39 | 2.5 | 37...41 | 90 | 500 | 0.5 | 0.1 | 5 | 30 | 0.04...0.12 |
| BZX55C43 | 43 | 2.5 | 40...46 | 90 | 500 | 0.5 | 0.1 | 5 | 33 | 0.04...0.12 |
| BZX55C47 | 47 | 2.5 | 44...50 | 110 | 600 | 0.5 | 0.1 | 5 | 36 | 0.04...0.12 |
| BZX55C51 | 51 | 2.5 | 48...54 | 125 | 700 | 0.5 | 0.1 | 10 | 39 | 0.04...0.12 |
| BZX55C56 | 56 | 2.5 | 52...60 | 135 | 700 | 0.5 | 0.1 | 10 | 43 | 0.04...0.12 |
| BZX55C62 | 62 | 2.5 | 58...66 | 150 | 1000 | 0.5 | 0.1 | 10 | 47 | 0.04...0.12 |
| BZX55C68 | 68 | 2.5 | 64...72 | 200 | 1000 | 0.5 | 0.1 | 10 | 51 | 0.04...0.12 |
| BZX55C75 | 75 | 2.5 | 70...79 | 250 | 1000 | 0.5 | 0.1 | 10 | 56 | 0.04...0.12 |
| BZX55C82 | 82 | 2.5 | 77...87 | 300 | 1500 | 0.25 | 0.1 | 10 | 62 | 0.05...0.12 |
| BZX55C91 | 91 | 1 | 85...96 | 450 | 2000 | 0.1 | 0.1 | 10 | 68 | 0.05...0.12 |
| BZX55C100 | 100 | 1 | 94...106 | 450 | 5000 | 0.1 | 0.1 | 10 | 75 | 0.05...0.12 |
| BZX55C110 | 110 | 1 | 104...116 | 600 | 5000 | 0.1 | 0.1 | 10 | 82 | 0.05...0.12 |
| BZX55C120 | 120 | 1 | 114...127 | 800 | 5500 | 0.1 | 0.1 | 10 | 91 | 0.05...0.12 |
| BZX55C130 | 130 | 1 | 124...141 | 950 | 6000 | 0.1 | 0.1 | 10 | 100 | 0.05...0.12 |
| BZX55C150 | 150 | 1 | 138...156 | 1250 | 6500 | 0.1 | 0.1 | 10 | 110 | 0.05...0.12 |
| BZX55C160 | 160 | 1 | 153...171 | 1400 | 7000 | 0.1 | 0.1 | 10 | 120 | 0.05...0.12 |
| BZX55C180 | 180 | 1 | 168...191 | 1700 | 8500 | 0.1 | 0.1 | 10 | 130 | 0.05...0.12 |
| BZX55C200 | 200 | 1 | 188...212 | 2000 | 10000 | 0.1 | 0.1 | 10 | 150 | 0.05...0.12 |

¹⁾ Tested with pulses t_p = 20 ms.

²⁾ The BZX55C0V8 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode lead to the negative pole.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103




ISO 14001:2004
Certificate No. 7116





ISO 9001:2000
Certificate No. 0506098

BZX55C

Breakdown characteristics
 $T_j = \text{constant (pulsed)}$

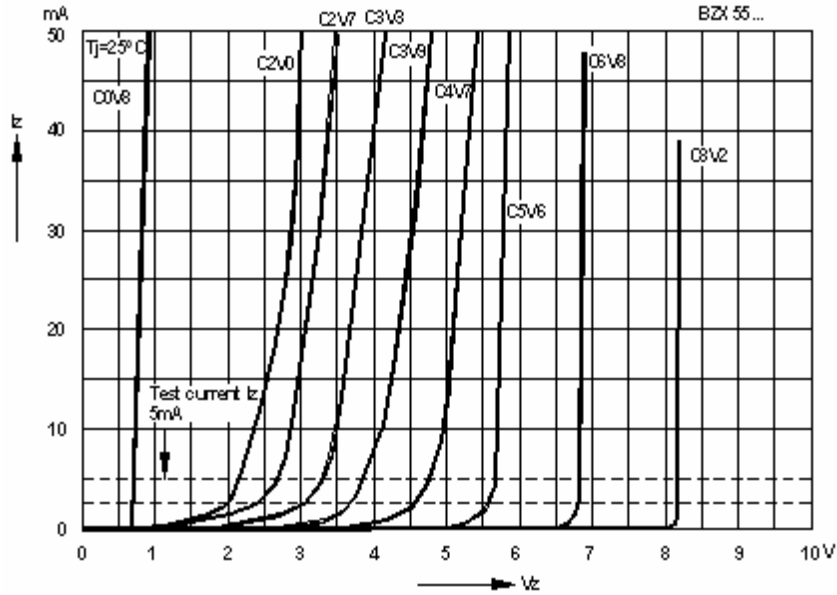

Breakdown characteristics
 $T_j = \text{constant (pulsed)}$

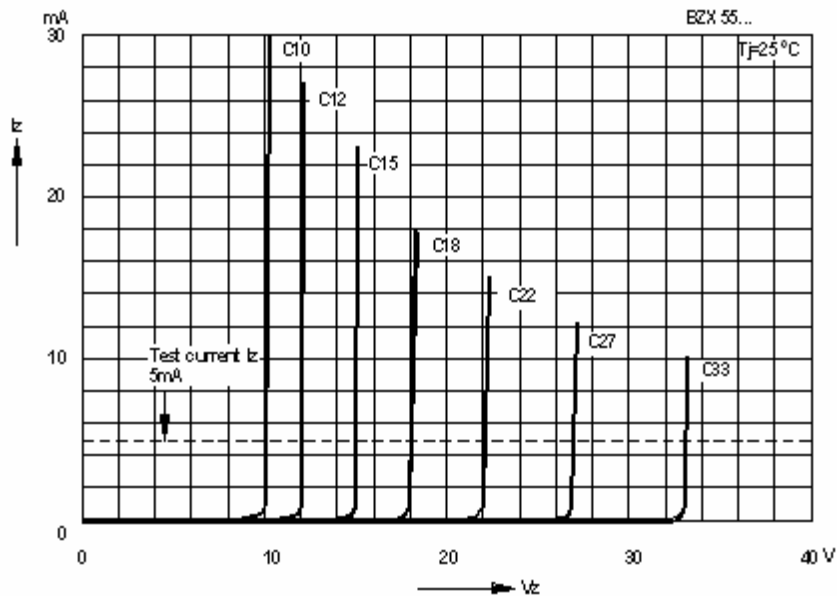

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103



ISO 14001:2004
 Certificate No. 7116



ISO 9001:2000
 Certificate No. 0506098

Dated : 12/06/2007